


ACKNOWLEDGEMENT SIGNS USED TO RECOGNIZE THOSE WHO SPONSOR ROADSIDE LANDSCAPES

Typical Appearance of installed Acknowledgement Signs

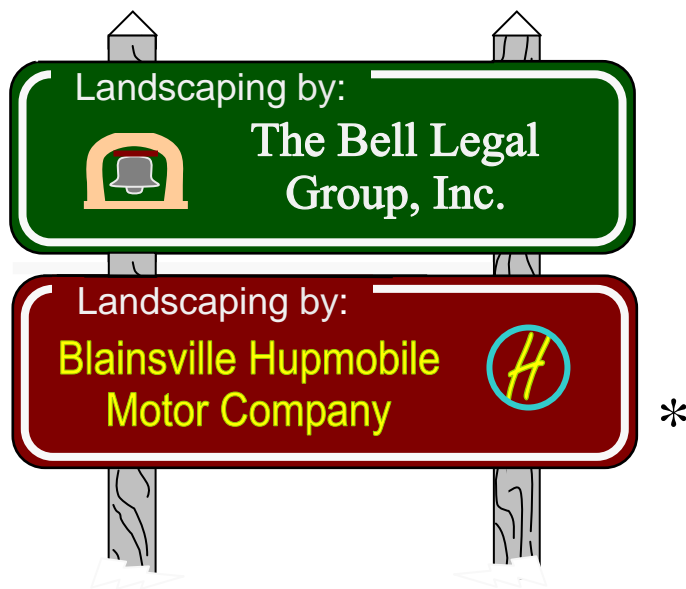

Color Combinations Allowed

Green: Pantone #349 Off White: Pantone Cool grey #1		
Burgundy: Pantone #188 Off White: Pantone Cool Grey #1		
Blue: Pantone #288 Off White: Pantone Cool Grey #1		

The Asset Management Division may approve colors equivalent to Pantones shown for signs and post. Any one of these color combinations may be used as the background and border.

Acknowledgement signs and structures shall conform to the following specifications:

- Sign Assembly: A maximum of two acknowledgement panels* shall be mounted per sign structure.
- Panel dimensions: Six (6) feet wide by 20 inches tall; 3 inches corner radii; 1.5 inch – 2 inches thick.
- Sign Material: High-density sign foam or equivalent
- Background color: Dark blue, dark burgundy, dark green, or off-white (Cool Grey) as specified above.
- Sign Border: Must be ¾ inches wide and inset 1 inch from outside edge, formed by sandblasting or routing a depth of ¼ inch to ½ inch. The words “Landscaping by” must be included in the upper left-hand area of the border. The line and words that form the border must be of off white if dark background and green, blue or burgundy if background is off-white (all colors as specified above). The words “Landscaping by” must be a minimum of 3 inches tall; the line portion of the border must be broken such that the words stand out.
- Acknowledgement content: A single sponsoring entity may be represented per panel. The representation shall be positioned a minimum of ½ inch inside the border and formed by sandblasting or routing to a depth of ¼ inch to ½ inch.
- Installation: The lowest panel must be no more than 30 inches above the ground line at the site. The space between panels must not exceed 4 inches. Each installation must be outside the “Errant Vehicle Clear Zone”.
- Post: A minimum of two posts shall be installed at all locations. Post tops shall not extend more than 5 inches above highest panel with the top 1 inch trimmed at a 45 degree angle. Post stain color must be solid gray (Pantone #423 or equivalent)



* In accordance with 24 VAC 30-121, only one acknowledgement panel will be permitted in certain situations.